


Type JXH-4BS



Short description

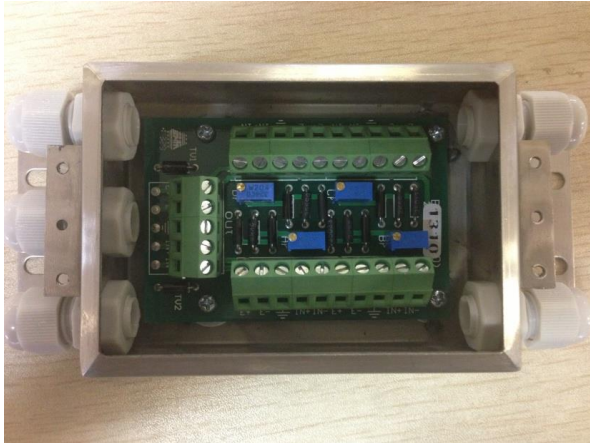

- Fit for 4-wire load cells
- Easy installation
- Stainless steel housing

Available models

Model	Amount of connections	Full article description	Part number
JXH-4Bs	4	JB-SS304 small 4 lcs (JXH-4Bs)	3008011


Detailed specifications JXH-4Bs

Load cell output resistance range	Ω	340 to 1100
Load cell input resistance range	Ω	340 to 1100
Excitation, recommended voltage	V(AC&DC)	5 to 15
Excitation, maximum	V(AC&DC)	20
Load cell sensitivity range	mV/V	0.6 – 3
Cable \varnothing	mm	5 to 6.2
Correction method		Excitation trim
Trimming range	Ω	20 (± 10)
Temperature range, operating	$^{\circ}\text{C}$	-40 ~ +85
Ingress protection		IP65
Housing connected to shield		No
External grounding		No

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Type JXH-4BS

Dimensions in mm

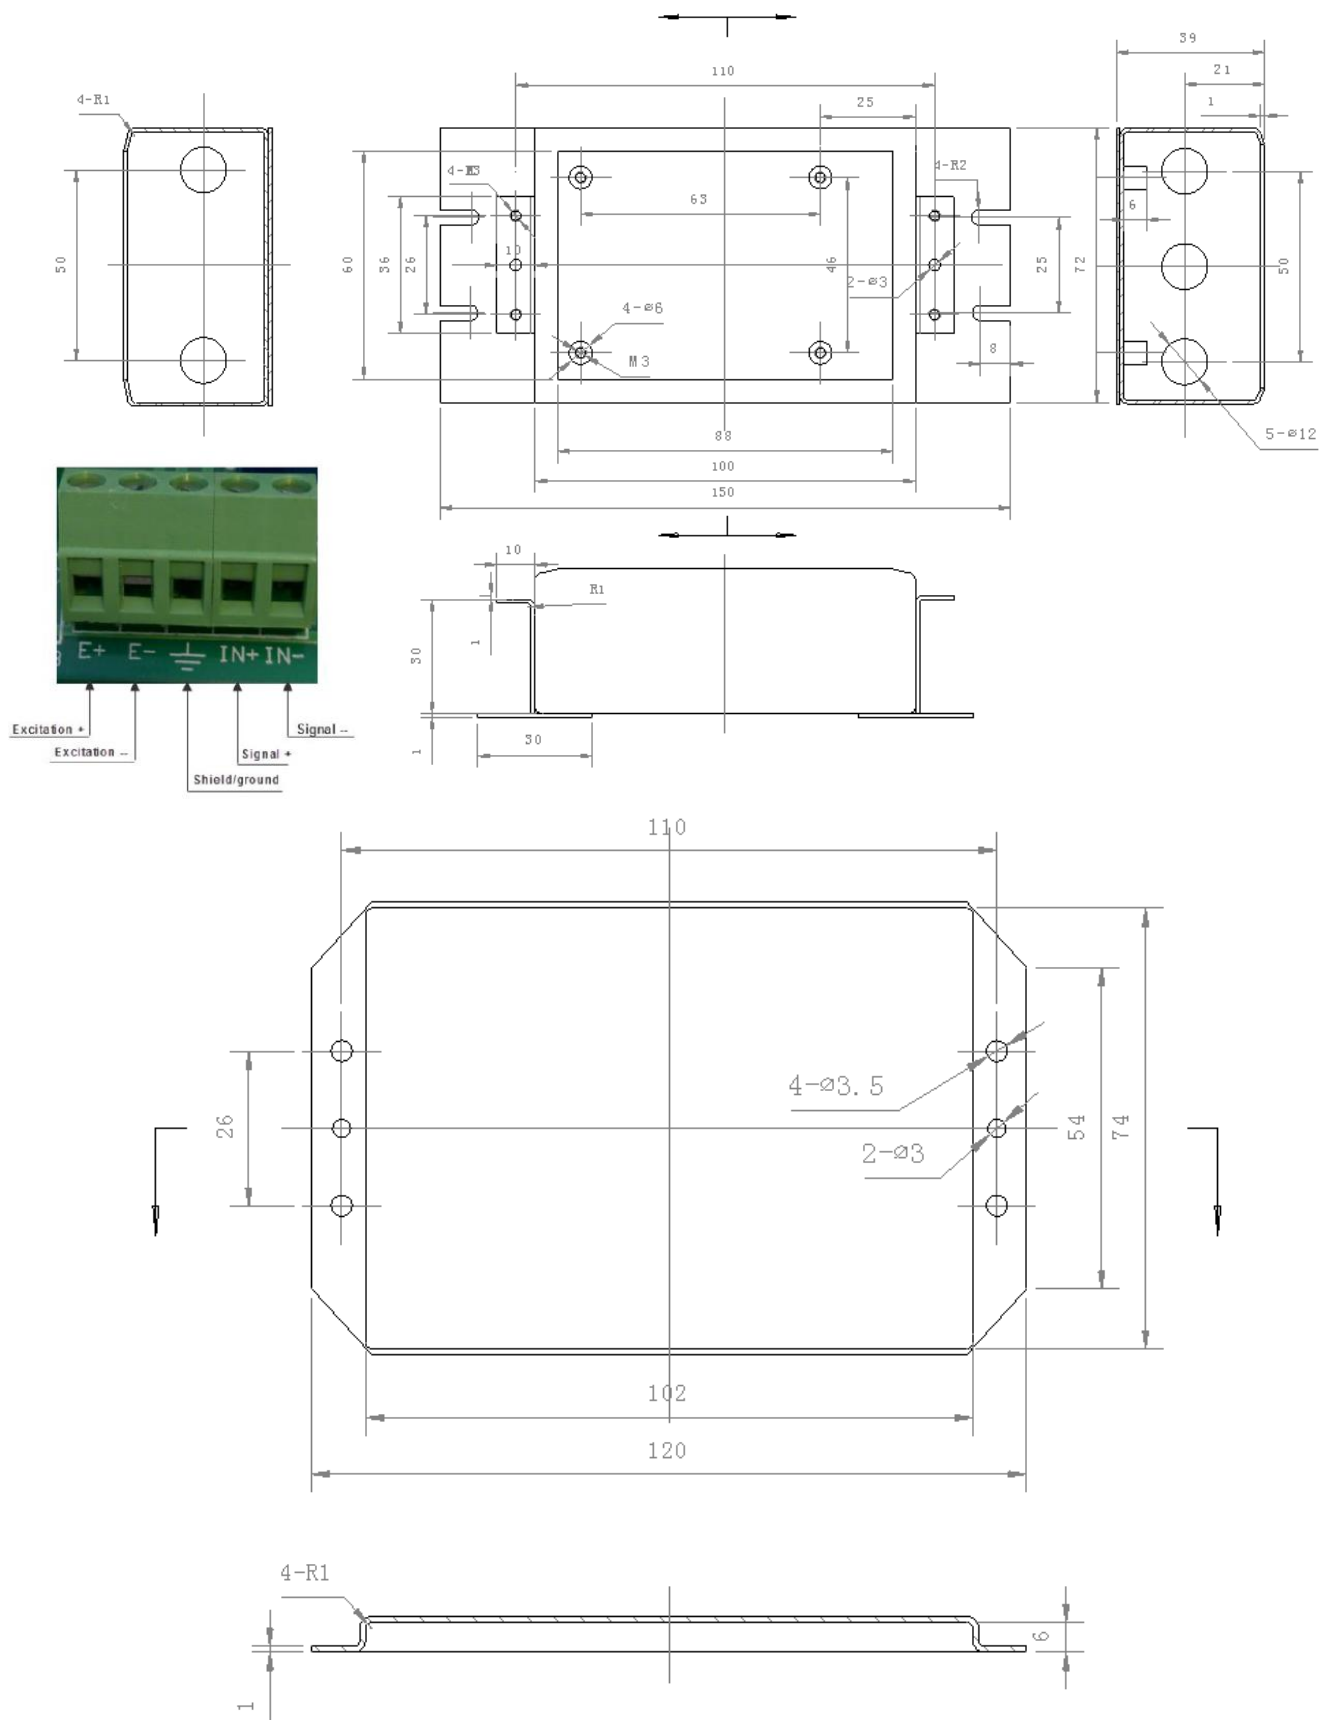

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.